

Spark - CXS1000: Compact, Full-Featured, Budget-Friendly IP-PBX | Static



Spark is ideal for small businesses and multi-site implementations.

Spark IP-PBX CXS1000 product line, based on CompletePBX, is compact, full-featured and budget-friendly. It is ideal for small businesses and multi-site implementations.

Overview

The Spark product line is a stand-alone, pre-configured, out-of-the-box IP-PBX featuring Xorcom's CompletePBX™ distribution. It is designed for businesses that want all the “bells and whistles” of enterprise-grade telephony systems but need support for only 2-30 users. It is ideal for small businesses and multi-site implementations.

Spark System Capabilities


- Supports 2-30 extensions
- Optional ½ PRI (up to 16 channels)
- Up to 16 analog ports (FXS and/or FXO)
- Up to 8 BRI ISDN ports (16 channels)
- Up to 30 concurrent SIP calls
- Up to 16 concurrent E1/T1 calls
- Up to 16 concurrent E1/T1/BRI/ FXS/FXO calls

Spark System Specifications


- Software: CompletePBX v. 4.5x
- 900MHz quad-core ARM Cortex-A7 CPU
- 10/100 Ethernet port
- 1GB RAM
- Two USB2 ports
- 8GB micro SD storage
- HDMI port
- Audio port

Sample Implementations

Standard Office

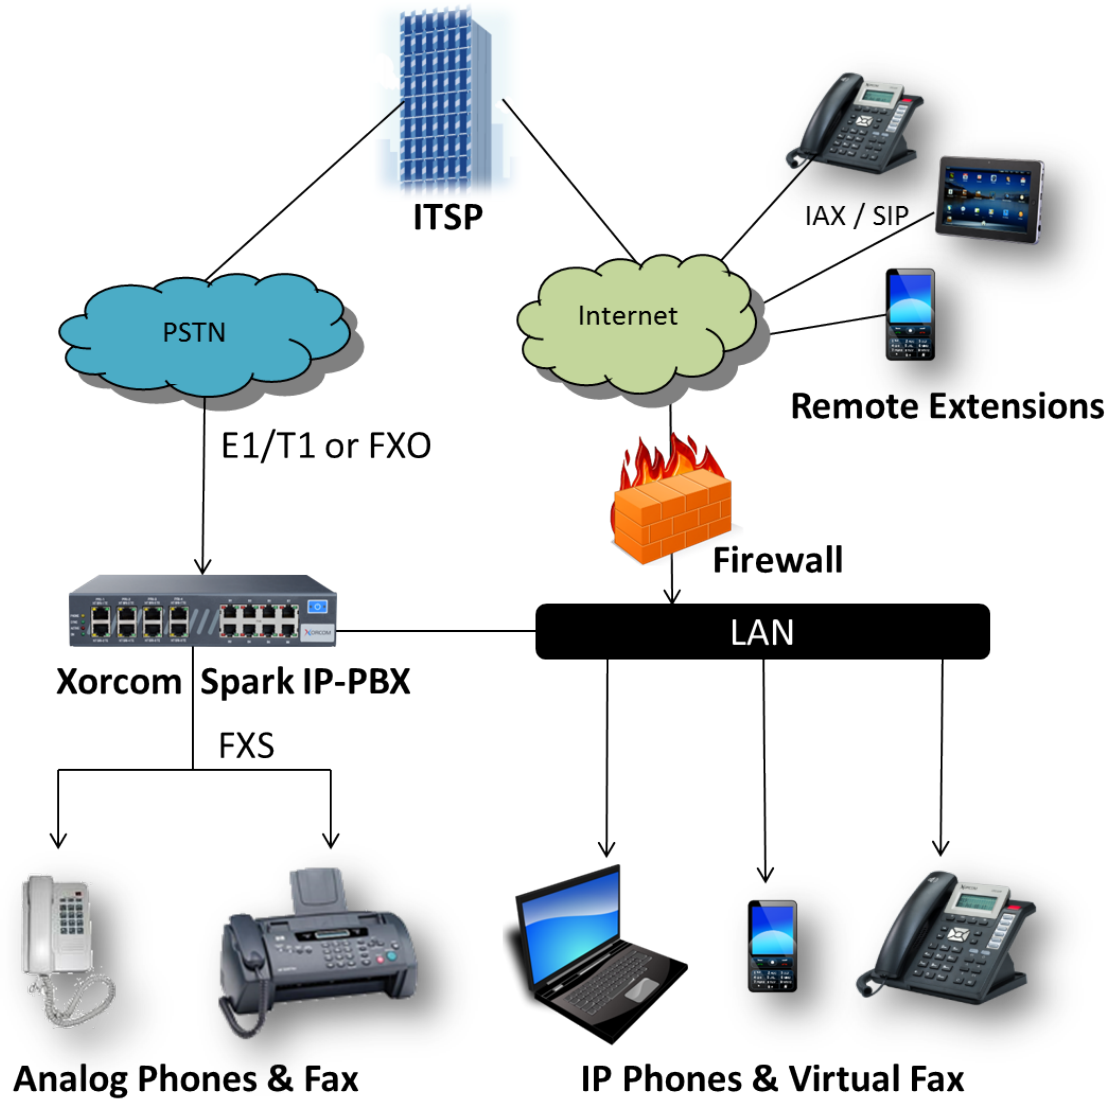

Sample Multi-Site Implementation

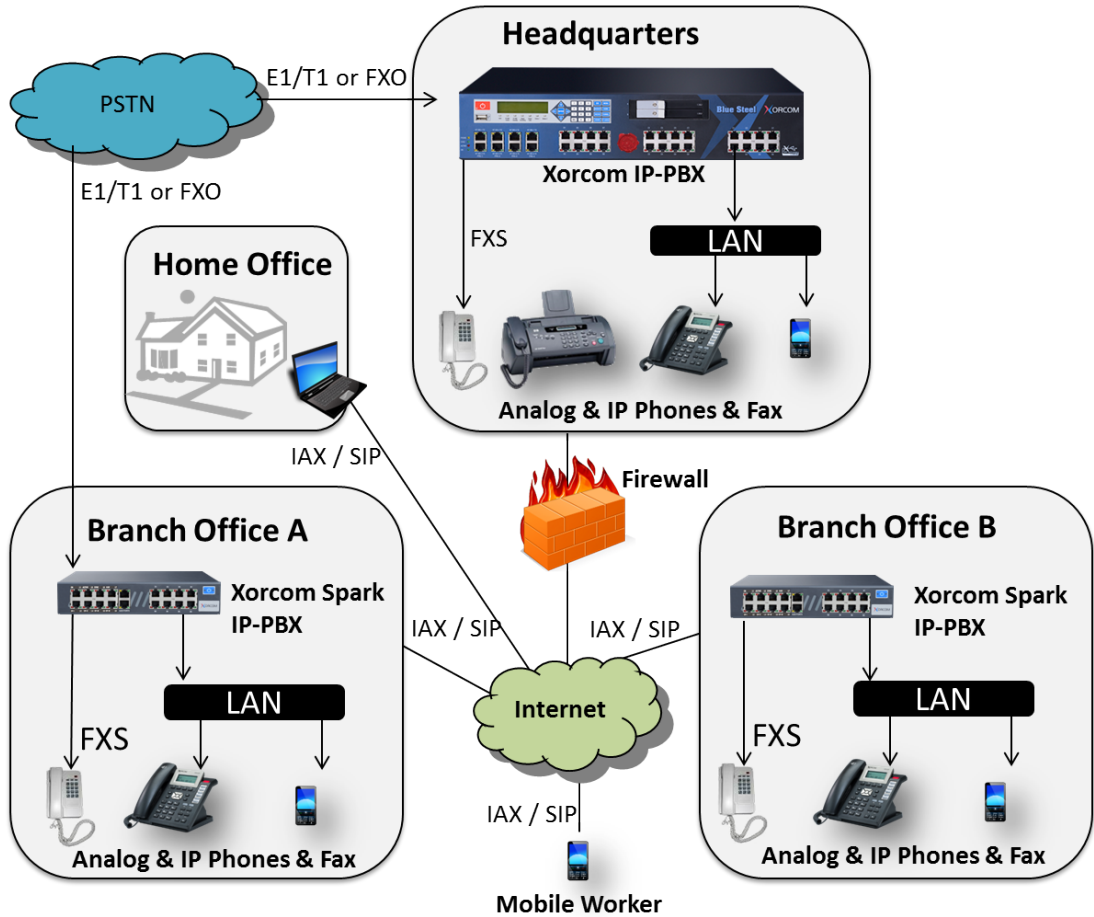

Supported Configurations

FXS Ports	FXO Ports	BRI Ports	½ PRI Port	P/N
-	-	-	-	CXS1000/NU
-	-	-	-	CXS1000
8	-	-	-	CXS1001
16	-	-	-	CXS1003

FXS Ports	FXO Ports	BRI Ports	½ PRI Port	P/N
8	8	-	-	CXS1004
2	6	-	-	CXS1012
-	-	2	-	CXS1013
-	-	4	-	CXS1014
-	-	8	-	CXS1015
-	8	-	-	CXS1019
-	16	-	-	CXS1020
8	-	4	-	CXS1029
6	2	-	-	CXS1030
8	-	2	-	CXS1033
8	-	8	-	CXS1042
-	8	2	-	CXS1087
-	8	4	-	CXS1093
-	8	8	-	CXS1099
6	2	2	-	CXS1138
6	2	4	-	CXS1139

FXS Ports	FXO Ports	BRI Ports	½ PRI Port	P/N
6	2	8	-	CXS1140
-	-	-	1	CXS1141
8	-	-	1	CXS1142
-	8	-	1	CXS1143

Last Updated (Thursday, 05 Nov 2015)